




# **LIGHTINGS**

Led Panels  
Frame Panels  
Backlit Panels

# LED PANELS

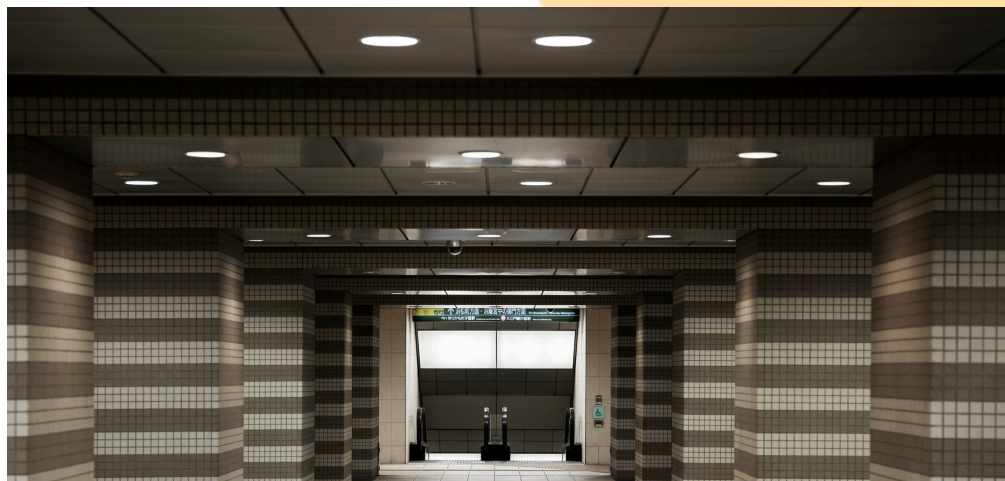


Type	Rated Power	Size	Shape	Light Guide	Warranty	Color Rendering (RA)	CCT	Light Color	Lumen efficacy	Input Voltage	Output	Power Factor (PF)	Flicker Free	Ingress Protection (IP)	Ambient Temperature (Ta)	Case Temperature (Tc)	Safety	Installation	Use	Dimmable	pcs/inner box	pcs/carton	MOQ
LED Panel Round	3W	3 in (76.2 mm)	Recessed Round	Downlight Fixture	2 years	80	6000K	Blue-white	160 lumen	85-277V 50/60Hz	9V 300mA	0.5	Yes	20	45°C	75°C	Voltage Resistance Test	Recessed	Interior	No	1	100	1000
LED Panel Round	6W	4 in (101.6 mm)	Recessed Round	Downlight Fixture	2 years	80	6000K	Blue-white	380 lumen	85-277V 50/60Hz	18V 300mA	0.5	Yes	20	45°C	75°C	Voltage Resistance Test	Recessed	Interior	No	1	100	1000
LED Panel Round	12W	6 in (152.4 mm)	Recessed Round	Downlight Fixture	2 years	80	6000K	Blue-white	1020 lumen	85-277V 50/60Hz	36V 300mA	0.5	Yes	20	45°C	75°C	Voltage Resistance Test	Recessed	Interior	No	1	30	3000





Type	Rated Power	Size	Shape	Light Guide	Warranty	Color Rendering (RA)	CCT	Light Color	Lumen efficacy	Input Voltage	Output	Power Factor (PF)	Flicker Free	Ingress Protection (IP)	Ambient Temperature (Ta)	Case Temperature (Tc)	Safety	Installation	Use	Dimmable	pcs/inner box	pcs/carton	MOQ
LED Panel Square	3W	3 in (76.2 mm)	Recessed Square	Downlight Fixture	2 years	80	6000K	Blue-white	160 lumen	85-277V 50/60Hz	9V 300mA	0.5	Yes	20	45°C	75°C	Voltage Resistance Test	Recessed	Interior	No	1	100	1000
LED Panel Square	6W	4 in (101.6 mm)	Recessed Square	Downlight Fixture	2 years	80	6000K	Blue-white	380 lumen	85-277V 50/60Hz	18V 300mA	0.5	Yes	20	45°C	75°C	Voltage Resistance Test	Recessed	Interior	No	1	100	1000
LED Panel Square	12W	6 in (152.4 mm)	Recessed Square	Downlight Fixture	2 years	80	6000K	Blue-white	1020 lumen	85-277V 50/60Hz	36V 300mA	0.5	Yes	20	45°C	75°C	Voltage Resistance Test	Recessed	Interior	No	1	30	3000

# FRAME PANELS

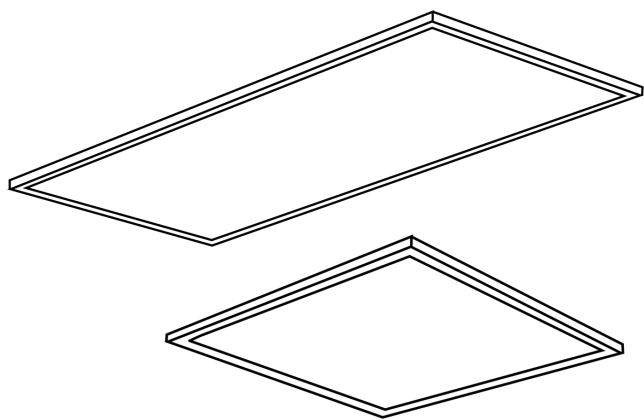

Type	Rated Power	Size	Shape	Light Guide	Warranty	Color Rendering (RA)	CCT	Light Color	Lumen efficacy	Input Voltage	Output	Power Factor (PF)	Flicker Free	Ingress Protection (IP)	Ambient Temperature (Ta)	Case Temperature (Tc)	Safety	Installation	Use	Dimmable	pcs/inner box	pcs/carton	MOQ
Frame panel	40W	24" x 24" (603 x 603 mm)	Recessed Square	downward diffuser	3 years	80	6000K	Blue-white	110 lumen / W	85-277V 50/60Hz	27-42V 1000mA	0.95	Yes	20	45°C	75°C	Class II	Recessed mounting in grid ceilings	Interior	No	2	10	1000
Frame panel	60W	24" x 48" (603 x 1213 mm)	Recessed Square	downward diffuser	3 years	80	6000K	Blue-white	110 lumen / W	85-277V 50/60Hz	27-42V 1400mA	0.95	Yes	20	45°C	75°C	Class II	Recessed mounting in grid ceilings	Interior	No	2	10	1000

# BACKLIT PANELS

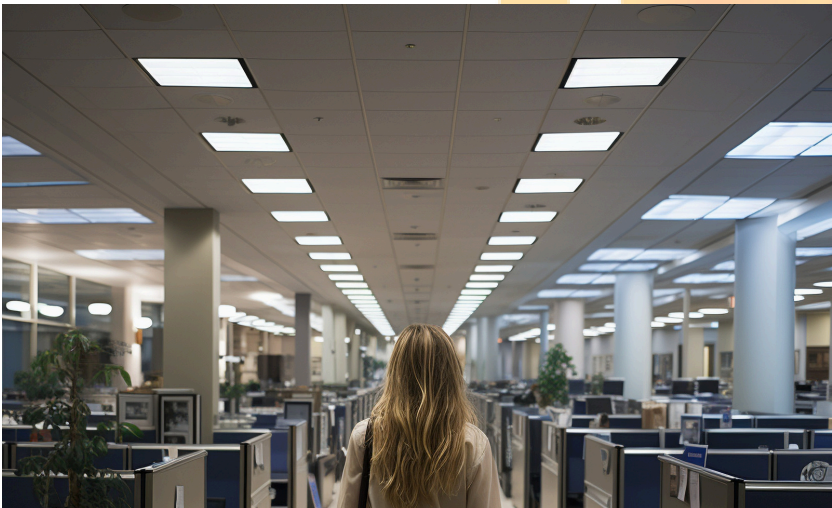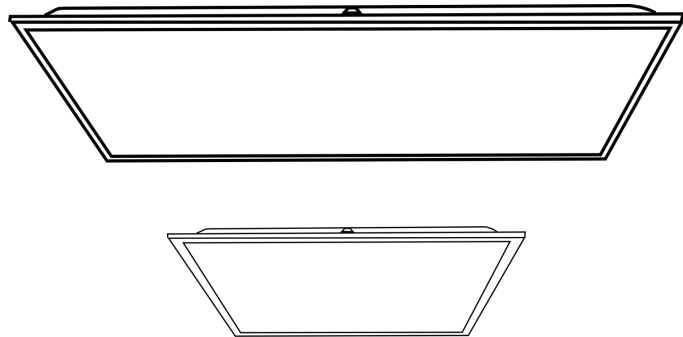

Type	Rated Power	Size	Shape	Light Guide	Warranty	Color Rendering (RA)	CCT	Light Color	Lumen efficacy	Input Voltage	Output	Power Factor (PF)	Flicker Free	Ingress Protection (IP)	Ambient Temperature (Ta)	Case Temperature (Tc)	Safety	Installation	Use	Dimmable	pcs/inner box	pcs/carton	MOQ
Backlit Panel	40W	24" x 24" (603 x 603 mm)	Recessed Square	downward diffuser	3 years	80	6000K	Blue-white	110 lumen / W	85-277V 50/60Hz	27-42V 1000mA	0.95	Yes	20	45°C	75°C	Class II	Recessed mounting in grid ceilings	Interior	No	0	8	800
Backlit panel	80W	24" x 48" (603 x 1213 mm)	Recessed Square	downward diffuser	3 years	80	6000K	Blue-white	110 lumen / W	85-277V 50/60Hz	27-42V 1000mA	0.95	Yes	20	45°C	75°C	Class II	Recessed mounting in grid ceilings	Interior	No	1	4	800